



GRAY FOX PERFORMANCE

Unleash Your Automotive Safety

grayfoxperformance.com

BMW M2/M3/M4/M5/M6/M8 Series

Fire Extinguisher Bracket

Installation Instructions

Tools Required

- M6 / 4mm allen key
- 10mm wrench/socket
- T50 Torx bit and ratchet

Recommended Fire Extinguisher

Gray Fox Performance recommends the Shield Fire Protection ABC rated fire extinguisher, manufacturer's part number 13315DAUT. This fire extinguisher is DOT approved, includes the required fire extinguisher mounting bracket, and can be purchased from most AutoZone stores and may be available from other common auto parts stores.

Important Notes

- Review and walk through the installation instructions prior to starting the installation process.
- Prior to installation, verify that this Gray Fox Performance Fire Extinguisher Bracket will fit your vehicle.
- This Gray Fox Performance vehicle fire extinguisher bracket can be installed on either the driver's side or passenger side.
- The recommended fire extinguisher above includes a required fire extinguisher mounting bracket which mounts to the Gray Fox Performance vehicle fire extinguisher bracket. If another fire extinguisher is used, it may be necessary to purchase a separate fire extinguisher mounting bracket which attaches the fire extinguisher to the Gray Fox Performance vehicle mounting bracket.

Washer Installation

When installing washers onto bolts during bracket installation, the flatwasher should be installed first, then the lock washer. The flat washer should sit flush against the fire extinguisher bracket.

IMPORTANT FITMENT NOTICE

The BMW M Series bracket is installed to the front of the seat itself in BMW M Series cars. There are two bolt holes, one on each side of the front of the seat, which this bracket mounts to. This bracket does not install to the seat mount points as with other Gray Fox Performance fire extinguisher brackets and will not fit non-M Series cars.


Step 1

Check the initial fitment of the fire extinguisher bracket by holding the bracket up against the seat mount points.

This fire extinguisher can be installed onto the drivers or passenger front seats.

Step 2

Attach the fire extinguisher mounting bracket using the included M6 x 15mm bolts, flat washers and lock washers, as shown in the images below. Keep in mind the fire extinguisher bracket will likely need to be offset toward the side of the fire extinguisher nozzle/handle, as shown in the image below.

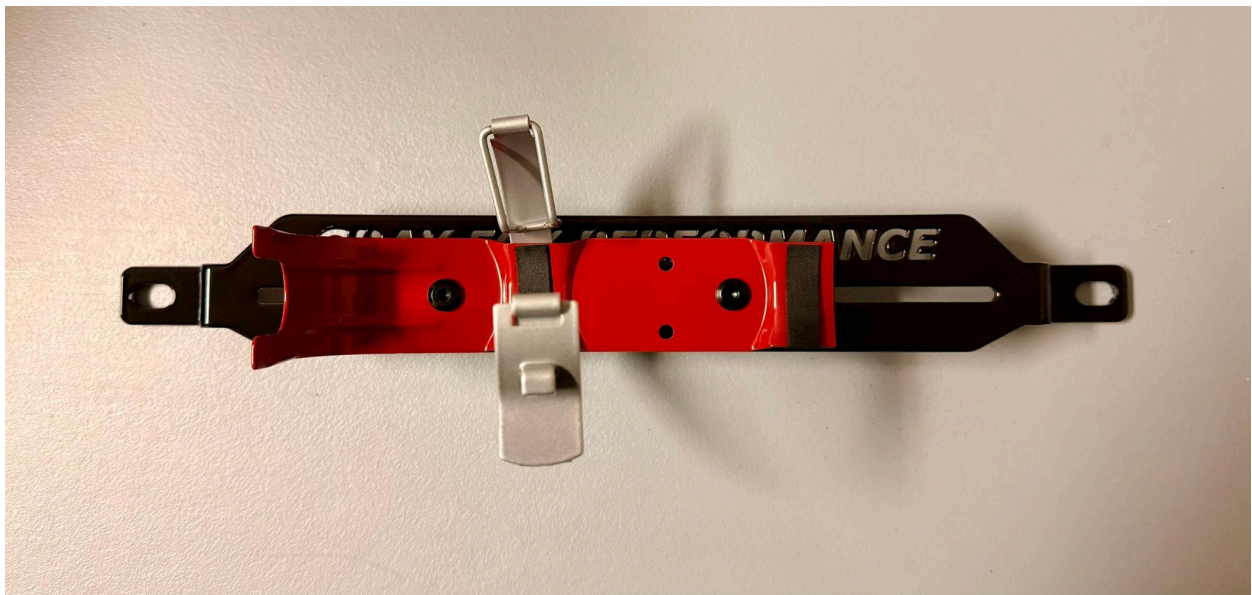



IMPORTANT NOTE:

When installing the Gray Fox Performance vehicle fire extinguisher bracket, take the following into consideration to ensure safe operation of the fire extinguisher during an emergency:

1. The fire extinguisher release mechanism should release the fire extinguisher forward toward the front of the car, vertically, and away from the seat when possible.
2. The fire extinguisher operating handle and nozzle should be placed in a position away from locations as much as possible where they could potentially be

damaged. Care should be taken during and after installation to prevent damage to all fire extinguisher parts.

Step 3

Ensure that all bolts and nuts on the Gray Fox Performance fire extinguisher bracket are secured and fully tightened.

Step 4

Remove any seat coverings which may hinder installation.

Step 5

Remove the two bolts from both sides of the front of the seat.

Step 6

Attach the Gray Fox Performance bracket to the front of the seat using the supplied bolts, washers, and nuts.

Step 7

Re-install any seat rail coverings which were previously removed.

Step 8

Re-install the fire extinguisher into the fire extinguisher mount.



Installation is complete!
Thank you for choosing GRAY FOX PERFORMANCE!